




AIR-OPERATED OIL DISPENSERS

Air-operated oil dispensers suitable for high-viscosity oil.

Filled with oil to 4/5 their capacity and pressurized to 90 - 120 psi, they work independently without requiring connection to the compressed air system. The air-operated oil dispensers are ideal for filling or topping-up engine, gearbox, differential, hydraulic power pack, reduction unit oil, etc.



6.4 gal



17.2 gal



P/N 33024-55

Air-operated oil dispenser with wheel-mounted 6.4 gal tank equipped with:

- level gauge
- delivery handle with flexible terminal
- P/N 24891-55 antislash funnel

P/N 33025-55

Air-operated oil dispenser with wheel-mounted 6.4 gal tank equipped with:

- level gauge
- delivery handle with flexible extension suitable for ATF (Mercedes connections) and electronic meter (P/N 37780-55)
- P/N 24891-55 funnel

P/N 33065-55

Air-operated oil dispenser with wheel-mounted 17.2 gal tank equipped with:

- level gauge
- P/N 37738-55 delivery control handle
- P/N 24891-55 funnel

P/N 33066-55

Air-operated oil dispenser with wheel-mounted 17.2 gal tank equipped with:

- level gauge
- P/N 37739-55 delivery control handle with flexible extension
- P/N 24891-55 funnel

Packaging - Weight


No. 1 3.0 ft³ lb 30

No. 1 3.0 ft³ lb 32

No. 1 6.5 ft³ lb 54

No. 1 6.5 ft³ lb 57

DETAILS AND ADVANTAGES

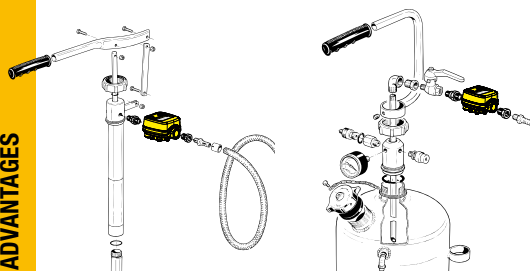


P/N 32713-55

Digital meter with adapters suitable for manual pump or air operated oil dispenser

P/N 24891-55

Antislash funnel. With antislash rim to prevent the liquid from spilling out when filling the tank

OVERALL DIMENSIONS inches

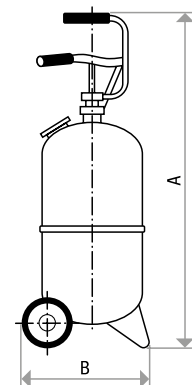

P/N	A	B
33024-55 - 33025-55	33.8"	11.0"
33065-55 - 33066-55	33.9"	23.6"