



OIL ACCESSORIES

P/N 33126-55

Female quick connector, thread 3/4" NPT (f) - high pressure 3600 psi

P/N 33127-55

Male quick connector, thread 3/4" NPT (f) - high pressure 3600 psi



P/N 33126-55

P/N 33127-55

Articles not manufactured by RAASM

P/N 38091-55

Check valve with connection for the flexible tube 1-1/4" - 1" NPT (f) thread to apply to the tank discharge tap



NIPPLES

- P/N 111414-55 Nipple 1/4" NPTF (m) x 1/4" NPTF (m)
- P/N 111438-55 Nipple 1/4" NPTF (m) x 3/8" NPTF (m)
- P/N 113838-55 Nipple 3/8" NPTF (m) x 3/8" NPTF (m)
- P/N 111212-55 Nipple 1/2" NPTF (m) x 1/2" NPTF (m)
- P/N 111234-55 Nipple 1/2" NPTF (m) x 3/4" NPTF (m)
- P/N 113434-55 Nipple 3/4" NPTF (m) x 3/4" NPTF (m)
- P/N 113401-55 Nipple 3/4" NPTF (m) x 1" NPTF (m)
- P/N 110101-55 Nipple 1" NPTF (m) x 1" NPTF (m)



ADAPTERS

- P/N 121438-55 Adapter 1/4" NPTF (m) x 3/8" NPTF (f)
- P/N 123814-55 Adapter 3/8" NPTF (m) x 1/4" NPTF (f)
- P/N 121234-55 Adapter 1/2" NPTF (m) x 3/4" NPTF (f)
- P/N 123412-55 Adapter 3/4" NPTF (m) x 1/2" NPTF (f)
- P/N 123401-55 Adapter 3/4" NPTF (m) x 1" NPTF (f)




P/N 65702-55

Tie down kit suitable for 55 gal container

P/N 65701-55

Tie down kit suitable for 16 gal container

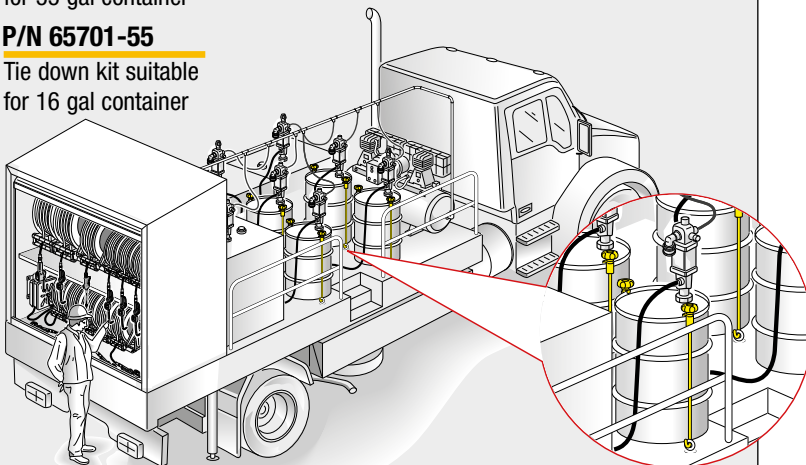

Note: the drum is not part of the kit



OIL ACCESSORIES

The 4-way evacuation valve is used for extraction and discharge of waste oil, fluid hydraulic gear, engine oil and antifreeze

P/N 38130-55

Evacuation valve with 3/4" NPT (f) connection


P/N 38131-55

Evacuation valve with 1" NPT (f) connection


P/N 38132-55

Evacuation valve with 1-1/2" NPT (f) connection

P/N	Seals	Connection	Dimensions	Pressure	Weight
38130-55	Viton®	3/4" NPT (f)	4"x 4"x 3"	200 psi	7 lb
38131-55	Viton®	1" NPT (f)	4"x 4"x 3"	200 psi	7 lb
38132-55	Viton®	1-1/2" NPT (f)	4"x 4"x 3"	200 psi	7 lb

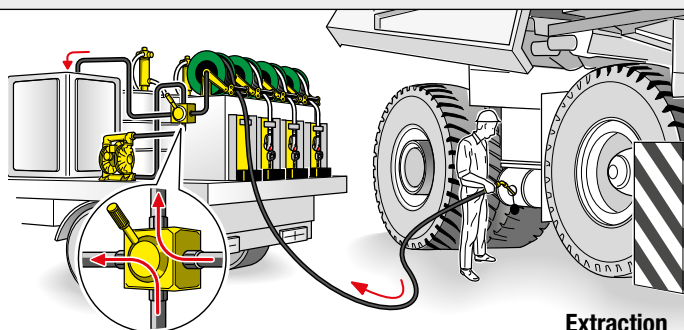

Extraction

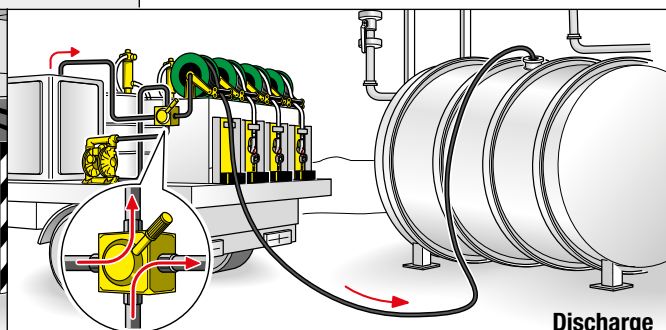


Discharge

P/N 38097-55

Flow regulator chamber 3/4" NPT (f/f) equipped with:

- one-way valve eliminates sudden pressure changes, ensuring a regular flow
- max pressure 1450 psi - suitable for R 1:1 - 3:1 - 5:1 pumps

Pressure trend of oil pump outlet

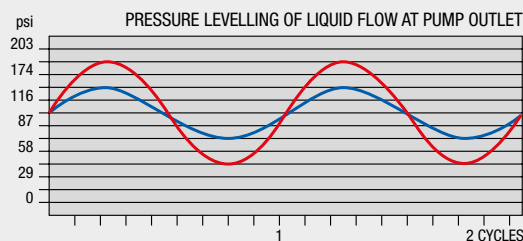

example 38097-55 - 116 psi
with pump R 3:1 - 3.70 gpm
■ without chamber 38097-55
■ with chamber 38097-55




P/N 38097-55

P/N 38098-55

Flow regulator chamber 3/4" NPT (f/f) with air tank equipped with:

- one-way valve eliminates sudden pressure changes, ensuring a regular flow
- max pressure 1450 psi - suitable for pumps till R 20:1

Pressure trend of oil pump outlet

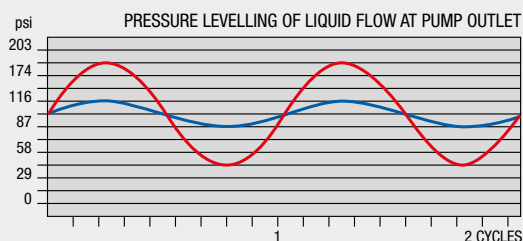

example 38098-55 - 116 psi
with pump R 3:1 - 3.70 gpm
■ without chamber 38098-55
■ with chamber 38098-55



P/N 38098-55




OIL ACCESSORIES

P/N 38210-55

Ball valve 1/2" NPT (f/f) total passage - max. pressure 1000 psi

P/N 38211-55

Ball valve 1" NPT (f/f) total passage - max. pressure 1000 psi

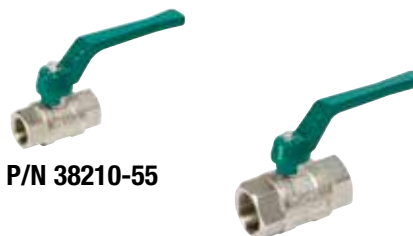

P/N 38210-55

P/N 38211-55

Articles not manufactured by RAASM

P/N 38095-55

"Y" filter in line - 1/2" NPT (f/f) for fitting on the outlet of pumps for oil and allied products

P/N 38096-55

"Y" filter in line - 1" NPT (f/f) for fitting on the outlet of pumps for oil and allied products



Articles not manufactured by RAASM

P/N 38099-55

Pressure relief valve - 1/2" NPT (f/f) - calibration 70 - 720 psi

P/N 38100-55

Pressure relief valve - 3/4" NPT (f/f) - calibration 70 - 720 psi



Articles not manufactured by RAASM

P/N 65160-55

Drum cover ø 23.7" for drums 55 gal (400 lb)
- 2" fixing union arranged for pump clamping ring

P/N 65138-55

Drum cover ø 15.2" for drums 16 gal (120 lb)
- 2" fixing union arranged for pump clamping ring

P/N 65142-55

Drum cover ø 16.55" for drums external ø 15" - 17"
- 2" fixing union arranged for pump clamping ring



P/N 38080-55

Hose connection ø 1-1/4" - connection 3/4" NPT (m)

P/N 38081-55

Hose connection ø 1-1/4" - connection 1" NPT (m)

P/N 38082-55

Hose connection ø 1-1/4" - connection 1-1/4" NPT (m)

P/N 38083-55

AISI 304 stainless steel hose connection ø 3/4" - connection 1" NPT (m)

